

MOSS LIGHTING

RENTAL INVENTORY



RENTAL INVENTORY

INDEX

MOVING LIGHT (pg. 3-8)

- Elation Dartz 360
- Becen BSW400 CMY
- V-Show Aura
- SHEHDS 100W Spot
- HES ShapeShifter C2
- V-Show B0640Z Tilt Batten

LED (pg. 9-11)

- ChromaQ Color Force 12
- V-Show s3602 Strobe
- V-Show 200W LED Blinder
- V-Show T360 Wireless Tube

CONVENTIONAL

- ETC Source Four Par
- ETC Source Four Parnel
- ProCan 20 Lite Blinder

ATMOSPHERE (pg. 12-14)

- Chauvet Geyser P4
- Ultratec Radiance Hazer
- Elation Magama Prime

CONTROL (pg. 15-18)

- MA3 Compact XT
- MA2 onPC Command Wing
- MA2 onPC Fader Wing
- ETC Ion 3k
- ETC 2x20 Fader Wing
- ETC 2x10 Fader Wing
- ETC Nomad 1024 w/ Gadget II
- Avolites AvoKey

DISTRIBUTION

- Lex 100 Amp 3Phase PD
- Obsidian EN12 & EN4 Node
- Netgear 8 & 16 Port POE
- MCSWE 2 Port Artnet to DMX
- 4ch XLR/DMX Ethernet Snake
- Wireless DMX System
- Apple Airport Extreme
- Elation 4ch Dimmer Pack

VIDEO

- Sanyo PLC-XF71 10k Projector
- LNS-W02Z 1.4-1.8:1 Lens
- LNS-W03 .8:1 Lens
- NEC NP-PA500U 5k Projector
- NP13ZL 1.4-3:1 Lens
- NEC NP-UM330W 3k Projector
- Kramer VP-730 Switcher
- Decimator MD-HX
- Resolume Arena License
- ASUS ROG STRIX G17
- ASUS Zenbook Duo

RIGGING

- 2.5m F34 Global Truss
- 19' 440lb Cap. Crank Stand
- 8' Tripod Stand w/ T-Bar
- Rockville RTP Go Totem Stand

MOSS

DARTZ 360

MOVING LIGHT | BEAM



FEATURES

- RGB Color Mixing
- 14 Gobos
- 16bit Continuous Pan & Tilt
- 3° Sharp Aperture
- Rotating 6-Facet Linear Prism
- Rotating 8-Facet Prism
- Motorized Focus
- Linear Frost
- Electronic Dimmer and Strobe

CONNECTIONS

- True1 In & Out
- 5pin DMX and Ethercon In/Out
- E-Fly Wireless Transceiver

SPECIFICATIONS

- 11.2"W 7.7"L 17.9"H
- 28lbs
- 100-240v
- 154W Max Consumption
- 50W LED

CONTROL

- DMX
- Art-NET
- sACN
- 19/22/25ch

BSW400 CMY

MOVING LIGHT | SPOT | HYBRID



FEATURES

- CMY Color Mixing
- Variable CTO
- 8 Slot Color Wheel
- 16bit 540° Pan & 270° Tilt
- 12 Static & 7 Rotating Gobos
- Rotating 4-Facet Linear Prism
- Rotating 4-Facet Prism
- 4°-35° Motorized Zoom
- Motorized Focus
- Frost
- Electronic Dimmer + Strobe

CONNECTIONS

- Powercon In/Out
- 3pin DMX In/Out

SPECIFICATIONS

- 17.7"W, 21.25"L, 24"H
- 49.6lbs
- 100-240v
- 500W Max Consumption
- 400W LED

CONTROL

- DMX 22/26ch
- RDM

AURA

MOVING LIGHT | WASH



FEATURES

- RGBW Color Mixing Output
- RGB Color Mixing Reflector
- 16bit 540° Pan & 270° Tilt
- 10°-60° Motorized Zoom
- Electronic Dimmer + Strobe

CONNECTIONS

- Powercon In/Out
- 3pin DMX In/Out

SPECIFICATIONS

- 11.8"W, 7.9"L, 15"H
- 20lb
- 19x15W LED Output
- 30x .5W LED "Aura" Reflector

CONTROL

- DMX 14/25ch
- Usable with Mac Aura Profiles

100W SPOT

MOVING LIGHT | SPOT



FEATURES

- 8 Position Color Wheel
- 16bit 540° Pan & 190° Tilt
- 7 Static Gobos
- 6 Rotating Gobos
- Rotating 6-facet Prism
- Motorized Focus
- 16° Fixed Beam
- Electronic Dimmer + Strobe

CONNECTIONS

- Powercon In
- 3pin DMX In/Out

SPECIFICATIONS


- 7.8"W, 9.8"L, 13.8"H
- 15.7lbs
- 100-240v
- 160W Max Consumption
- 100W LED

CONTROL

- DMX 16ch

SHAPESHIFTER C2

MOVING LIGHT | WASH | FX

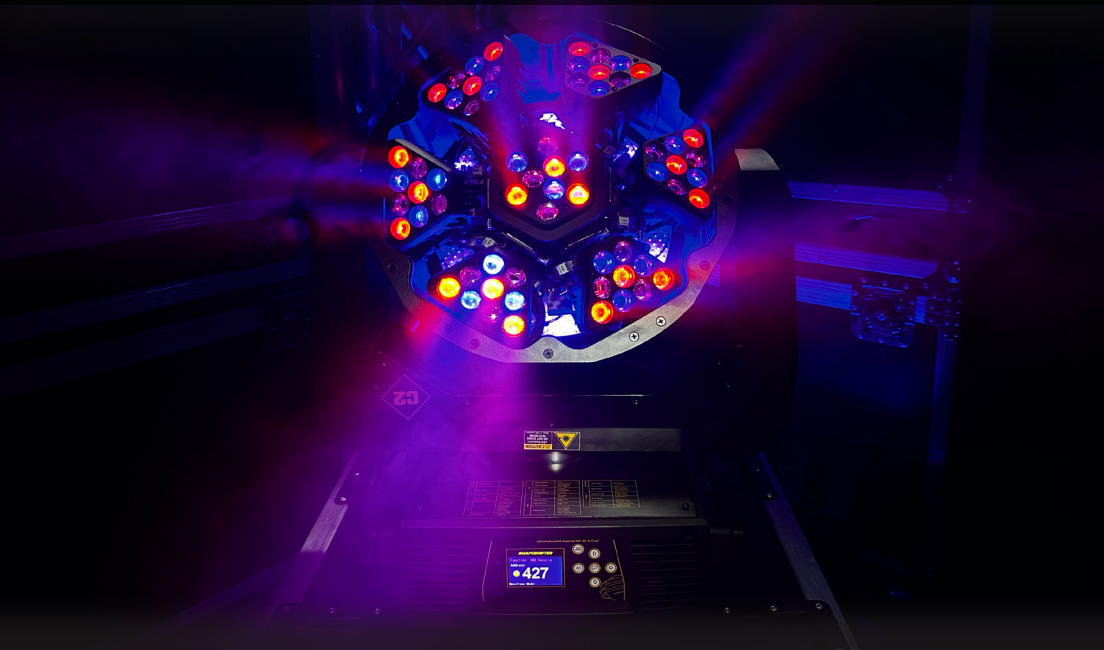

FEATURES

- RGB Color Mixing
- UV Reflector
- 16bit 630° Pan & 270° Tilt
- 7 “Pixel” Modules
- 6 Modules w/ 36° Pan & Tilt
- 10° Beam Per Module
- 15°-58° “Zoom”
- Electronic Dimmer + Strobe

CONNECTIONS

- Powercon In
- 3pin + 5pin DMX In/Out

SPECIFICATIONS

- 19.3”W, 12.7”L, 22.4”H
- 45lbs
- 63 x LED

CONTROL

- DMX 28/79ch
- RDM

BOG40Z TILT BAR

MOVING LIGHT | WASH | BEAM



FEATURES

- RGBW Color Mixing
- 16bit 270° Tilt
- 5°-45° Motorized Zoom
- 6 Pixel Zones
- Electronic Dimmer + Strobe

CONNECTIONS

- Powercon In/Out
- 3pin DMX In/Out

SPECIFICATIONS


- 20"W, 3.9"L, 11.8"H
- 19.8lbs
- 100-240v
- 640W Max Consumption
- 6x40W LED

CONTROL

- DMX18/32ch
- RDM

S3602 STROBE

LED | STROBE | EYE CANDY

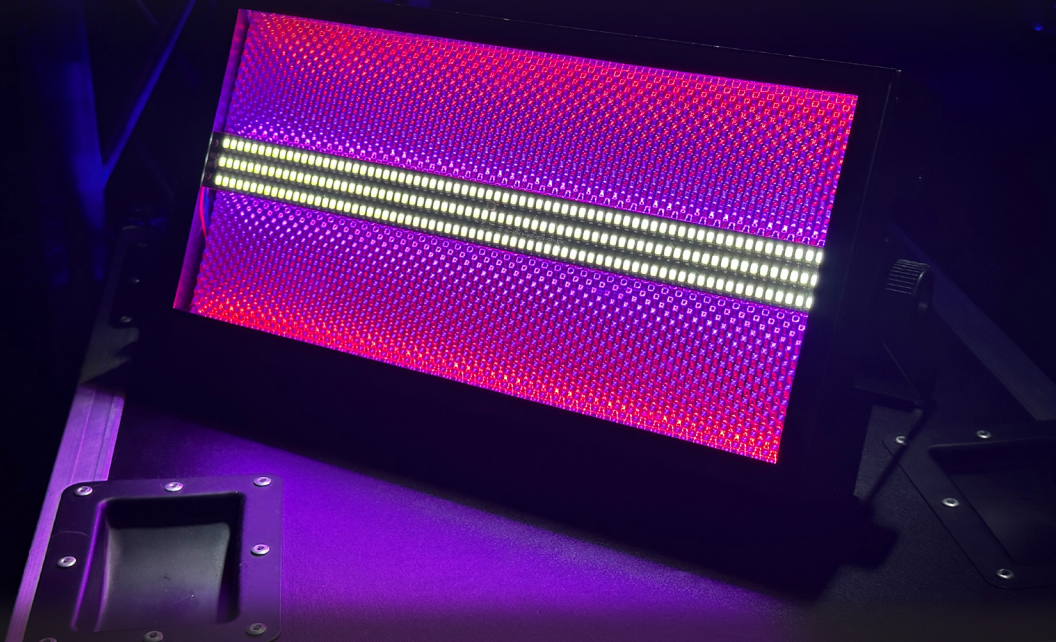

FEATURES

- RGB Color Mixing
- 48 Pixel Reflector “Aura”
- 120° White Center LED
- Electronic Dimmer + Strobe
- Interconnectable Rigging

CONNECTIONS

- Powercon In/Out
- 3pin DMX In/Out

SPECIFICATIONS


- 18.1”W, 3.3”L, 10.4”H
- 9.6lbs
- 216x.5W White LED
- 144x.5w Reflector LED

CONTROL

- DMX 7/13/148ch

T360 LED TUBE

LED | WASH | EYE CANDY

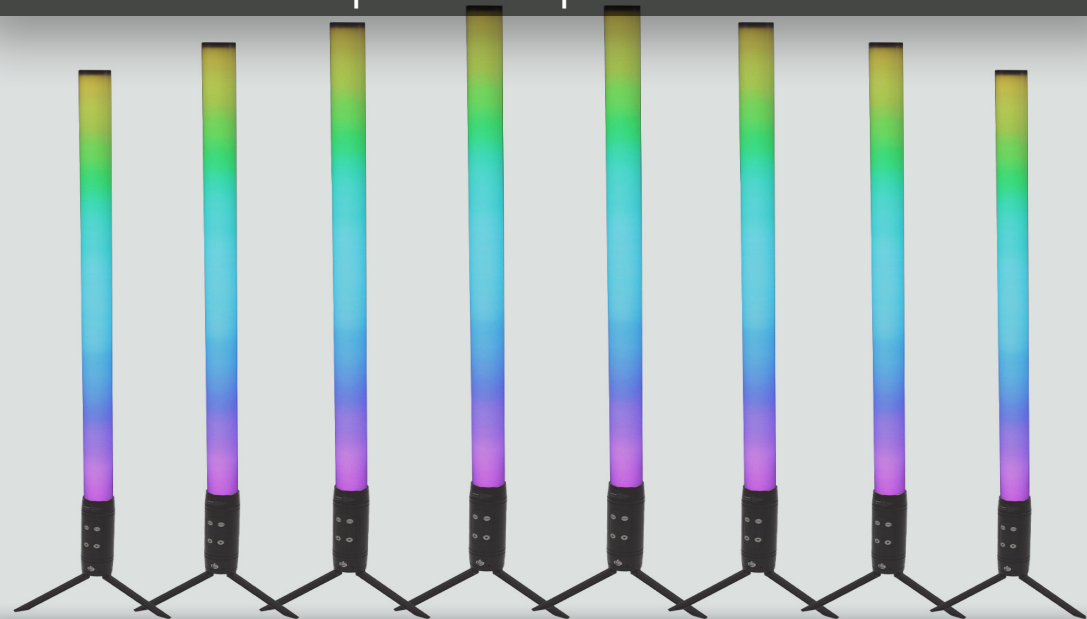

FEATURES

- RGB Color Mixing
- 16 Pixel Sections
- 360° Soft Light
- Battery Powered
- Freestanding Tripod Stand
- Hanging Clamp
- Wireless Control Unit

CONNECTIONS

- Powercon In/Out
- 3pin + 5pin DMX In/Out
- Ethercon In/Out

SPECIFICATIONS

- 2"W, 2"L, 44.5"H
- 96pcs 5050 RGB LED
- 100-240v
- 200W Max Consumption
- 10hr Battery, 5hr Charge

CONTROL

- DMX 7/36/48ch
- Artnet
- IR Wireless
- App (LED LAMP)

COLOR FORCE 12

LED | WASH



FEATURES

- RGBA Color Mixing
- 2 Cell Control
- 26° Beam
- Electronic Dimmer + Strobe

CONNECTIONS

- Powercon In/Out
- 5pin DMX In/Out

SPECIFICATIONS


- 13.2"W, 7.5"L, 8.6"H
- 9lb
- 100-240v
- 120W Max Consumption

CONTROL

- DMX 1/3/4/5/6/7/8/9ch

GEYSER P4

ATMOSPHERE | FOG | FX

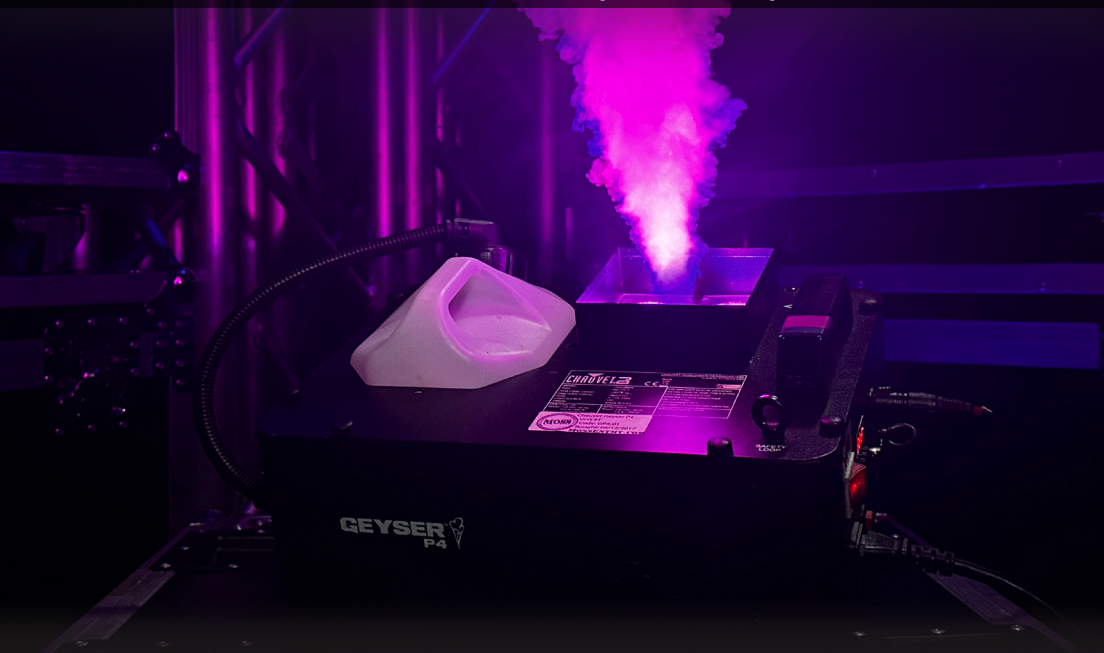

FEATURES

- RGBA+UV Color Mixing
- Pyrotechnic Like Effect
- Vertical Fog Jet Up To 12'
- Electronic Dimmer + Strobe

CONNECTIONS

- IEC Power Input
- 3pin DMX In/Out

SPECIFICATIONS

- 13.4"W, 10.2"L, 7"H
- 12.4lbs
- 120v
- 1,300W Max Consumption
- Output 13,500 CFM

CONTROL

- DMX 10ch
- Wireless Remote

RADIANCE HAZER

ATMOSPHERE | HAZE



FEATURES

- Water Based Hazer
- Continuous Run Time
- Variable Haze Volume
- Variable Fan Speed
- Efficient Fluid Use

CONNECTIONS

- IEC Power In
- 5pin DMX In/Out
- 5pin Remote

SPECIFICATIONS

- 16"W, 13"L, 7"H
- 28lbs
- 120v
- 500w Max Consumption
- Output 10,000 CFM

CONTROL

- DMX 2ch
- Manual
- Wired Remote

MAGMA PRIME

ATMOSPHERE | FAZER



FEATURES

- Water Based Hazer + Fogger
- Continuous Run Time
- Variable Haze Volume
- Variable Fan Speed

CONNECTIONS

- True1 In
- 5pin DMX In/Out

SPECIFICATIONS

- 13.3"W, 6.3"L, 15.7"H
- 22.4lbs
- 120v
- 700W Max Consumption
- Output 4,000 CFM

CONTROL

- DMX 1/3/5ch
- RDM
- Manual
- Timer

MA3 COMPACT XT

CONTROL | CONSOLE



FEATURES

- 2 Built In Multi Touch Screens
- 5 Dual Clicking Encoders
- 17 Motorized Backlit Fader
- 38 RGB Backlit Mini Encoders
- 61 Assignable Executors
- Dedicated Intensity Wheel

CONNECTIONS

- Powercon Input
- 6 Total 5pin DMX Outputs
- 5pin DMX Input
- USB Type A
- Midi In/Out
- 3pin XLR LTC Input
- DisplayPort Out

SPECIFICATIONS

- 8,192 Parameters in MA3
- 4,096 Parameters in MA2
- 34"W, 17"L, 17"H
- 120-240v
- 45lbs

CONTROL

- DMX
- Artnet
- sAcn
- MA-net
- RDM
- Midi

MA2 ONPC

CONTROL | PC WING



FEATURES

- 2,048 Parameters Per Wing
- 4 clicking Encoders
- Rolling Level Wheel
- grandMA2 Command Section
- Main Cuestack Buttons
- 21 Total Assignable Faders

CONNECTIONS

- IEC Power Input
- 6 Total 5pin DMX Outputs
- 5pin DMX Input
- USB Type B
- Midi In/Out
- 3pin XLR LTC Input

SPECIFICATIONS

- 21.3"W, 15.7"L, 3"H
- 120-240v
- 13.2lbs

CONTROL

- DMX
- Artnet
- sAcn
- MA-net
- RDM
- Midi

ETC ION CLASSIC

CONTROL | CONSOLE



FEATURES

- 6,144 Parameters
- Master Playback Fader Pair
- Dedicated Grandmaster
- Four Pageable Encoders
- Running ETC Eos 2.9
- 19" Elo Touchscreen Included

CONNECTIONS

- IEC Power Input
- 7 USB A
- Midi In/Out
- 2 DVI
- VGA
- Ethernet

SPECIFICATIONS

- 17.9"W, 18.2"L, 5.3"H
- 120-240V
- 240W Power Consumption

CONTROL

- DMX
- Artnet
- sAcn
- RDM

ETC FADER WINGS

CONTROL | EXPANSION ACCESSORY



FEATURES

- Up To 40 Assignable Faders
- Compatible w/ ETC Eos Family
- Compatible w/ ETC Nomad
- Integral LCD Display

CONNECTIONS

- 12v Power Input
- USB B

SPECIFICATIONS

- 17.9"W, 15.9"L, 5.3"H
- 12v DC
- 10w Power Consumption
- 20 & 40 Fader Options

CONTROL

- ETC Eos Family
- ETC Nomad (PC)

100AMP 3 PHASE

DISTRIBUTION



FEATURES

- Power Distribution
- Compact Design
- Latching Circuit Cover
- Color Cordinated Legs

CONNECTIONS

- Camlock 5 Wire Input
- 20x Edison Receptacles

SPECIFICATIONS

- 14.5"W, 14.5L, 14.25H
- 120-208V
- 3 Phase
- 100amp Max Per Leg
- 15x 20amp Circuit Breaker

ROCKVILLE RTP GO

RIGGING | STAND



FEATURES

- Easy To Assemble
- No Tools Required
- Adjustable Height
- Holes For Cabel Management
- Black or White Scrim
- Compact For Travel
- Carrying Bag
- Black Metal
- Optional Speaker Mount

SPECIFICATIONS

- 19.6"W, 19.6L, .11H Base
- 11.8"W, 11.8L, 39"-70"H Totem
- 31.5"W, 12"L, 6.3"H Transport
- 37lbs Unit Weight
- 132lbs Max Weight